
Chapter 6

Mounting Guideline and Thermal Design

Contents	Page
1. Soldering to PCB	6-2
2. Mounting to Heat sink	6-3
3. Cooler (Heat Sink) Selection.....	6-4

1. Soldering to PCB

Soldering

- (1) The device temperature during soldering is possible to exceed the maximum storage temperature. To avoid device damage and to ensure reliability, the following guidelines are recommended from the quality assurance standard.

Table 6.1 Soldering temperature and duration


	Methods	Soldering Temp. & Time	Note
a	Solder dipping / Soldering iron	260±5°C, 10±1sec	
b	Solder dipping / Soldering iron	350±10°C, 3.5±0.5sec	

- (2) The immersion depth of the lead terminal should keep the distance 1.5mm apart from the device. When using flow-soldering, be careful to avoid immersing the package in the solder bath.
- (3) We do not recommend to re-use the device once after solder is removed and detached from the board. The detached device from PCB might be damaged by thermal or mechanical stress when the solder is removed.

2. Mounting to heat sink

Mounting procedure and precautions

When mounting the IPM to a heat sink, please refer to the following recommended procedure of fastening conditions. One side screwing with excessive torque might cause a destruction and degradation of the chip.

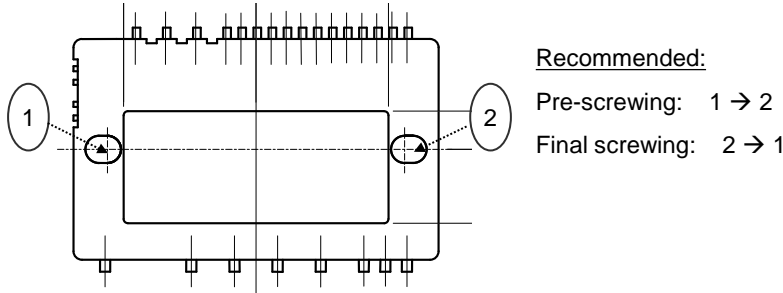

Note: the pre-screwing torque is set to 30% of the maximum torque rating.

Fig.6-1 Recommended screw fastening procedure

Fig.6-2 shows the measurement position of heat sink flatness.

The heat sink flatness should be from 0 μ m/100mm to +100 μ m/100mm, and the surface roughness (Rz) should be less than 10 μ m.

If the heat sink surface is concave, a gap occurs between the heat sink and the IPM, leading to deterioration of cooling efficiency.

If the flatness is +100 μ m or more, the aluminum base of the IPM is deformed and cracks could occur in the internal isolating substrates.

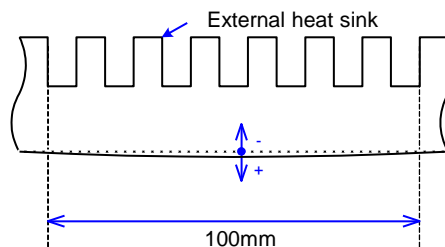


Fig.6-2 The measurement point of heat sink flatness

In order to obtain effective heat dissipation, thermal compound with good thermal conductivity should be applied uniformly with +50 μ m thickness on the contacting surface between the IPM and heat sink. Refer to the following information for an application position and application quantity.

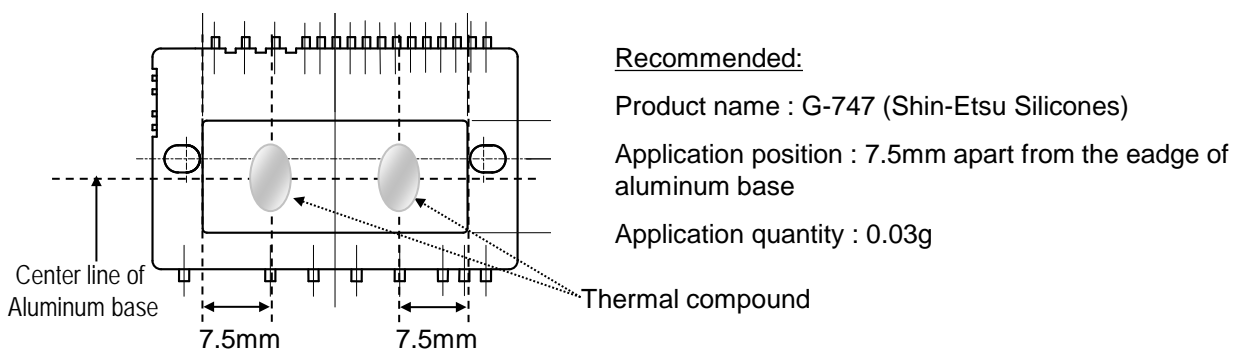


Fig.6-3 Recommended an application position and application quantity.

3. Cooler (Heat Sink) Selection Method

- Please make sure that the junction temperature T_j should not exceed T_{jmax} for safe operation. Cooling device (heat sink) should be designed to ensure that T_j is always below T_{jmax} even in abnormal conditions such as overload operation as well as under the rated load.
- If the IGBT junction temperature is higher than T_{jmax} , it might cause a damage to the chips. The T_{jOH} protection function works if the junction temperature exceeds T_{jmax} . However, if the temperature rises too quickly, the T_{jOH} protection may not work.
- Please note that the junction temperature of FWD should not exceed T_{jmax} also.
- When selecting a cooling device (heat sink), please measure the temperature directly as shown in Fig.2-2.

For more detail about thermal design, please refer Chapter 6 Section 2 of this note and “IGBT MODULE APPLICATION MANUAL REH984b”

Contents:

- Power dissipation loss calculation
- Selecting heat sinks
- Heat sink mounting precautions
- Troubleshooting